

Figure A-3

CUL-DE-SAC STREETS

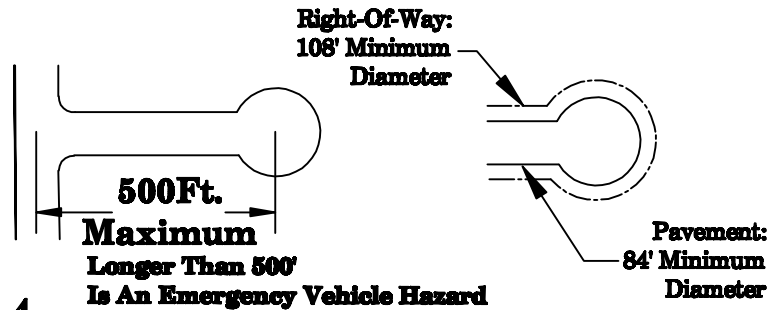


Figure A-4

BLOCK LAYOUT


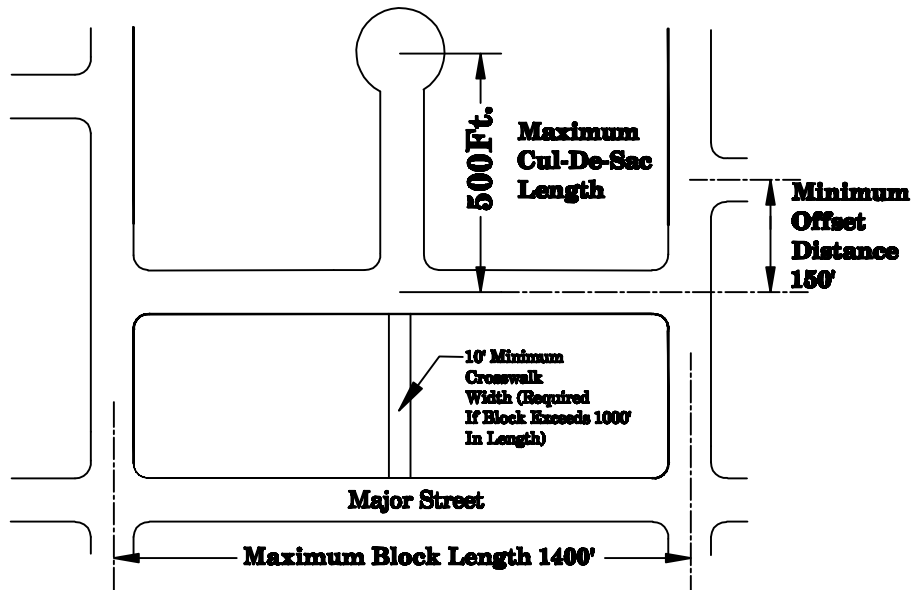


Figure A-5


MINIMUM STREET GRADE

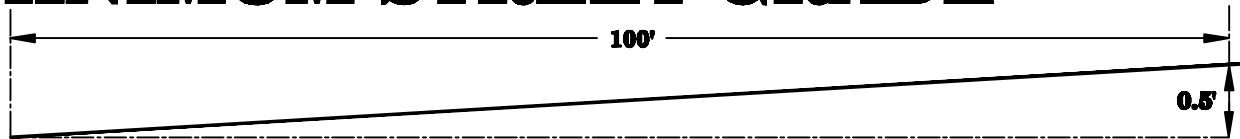

To Allow Satisfactory Drainage Of Stormwater, Street Grades Shall Not Be Less than 0.5%.

Figure A-6

MAXIMUM STREET GRADE

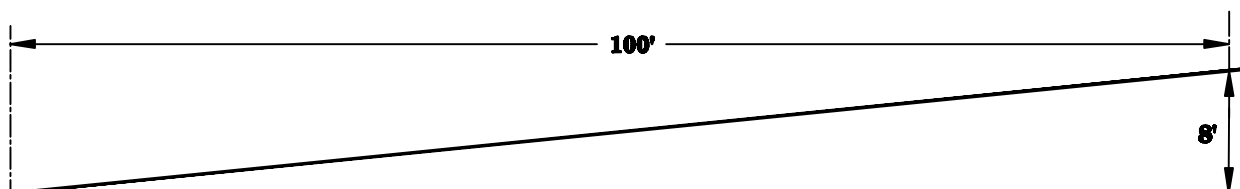

To Reduce Traffic Hazards Due To Slippery Pavements, Street Grades Shall Not Exceed 12% On Local Streets Or 8% On Collectors.